

Recurrent Neural Networks to Identify Fault in Transmission Line

by Azriyenni20 Azhari

Submission date: 21-Mar-2020 04:19PM (UTC+0700)

Submission ID: 1279229673

File name: draf_kansai-AZ.pdf (3.85M)

Word count: 4291

Character count: 21306

Recurrent Neural Networks to Identify Fault in Transmission Line

Azriyenni Azhari Zakri¹, Sahala Tua²

Electrical Engineering Department, Universitas Riau-Pekanbaru, Indonesia^{1,2}
Email: azriyenni@eng.unri.ac.id, sahala.tua@student.unri.ac.id



Abstract— The transmission system is the connecting part of the power station and, distribution is capable of being forwarded to the load center. If there is a fault in the transmission line by interrupting electricity supply to the load, then this will cause a loss for consumers. Therefore, another technique is needed to identify the fault in the electrical power distribution system accurately and quickly, by reducing search time and speeding up the repair process. This study will present a method to identify fault by classifying and estimating the location of a fault in the 115 kV transmission system. This technique is performed by combining Discrete Wavelet Transformation (DWT) and Recurrent Neural Networks (RNNs) of Elman. DWT aimed at extracting information of transient signals for each phase current and zero sequence current during one cycle when the fault starts. Elman RNNs are classified to detect a fault in each phase and ground, while Elman RNNs are used to measure the location of the fault in the transmission line. Training and testing data be carried out for the simulation of short circuit fault under different of fault resistance and varying starting angle. Short circuit fault applied in the transmission line to 115 kV bus LK to BK on 63km line lengths. Fault classification results obtained are an accuracy of 100% and the estimated location of fault obtained the largest average error value is 1.4%.

Keywords— Fault Identification, Short-Circuit, RNNs, DWT.

1. Introduction

The transmission line is an essential element of the electric power system to send electrical energy from a power station to a distribution network connected then to load. A fault that occurs in the transmission line can be converted to the termination of power supply in the distribution system, which gives rise to black out at the consumer terminals [1]. The short-circuit fault may occur asymmetrically and symmetrically [2]. Asymmetric fault comprises single-phase fault to ground, phase to phase, and double phases to ground. While symmetrical fault is the three-phase fault. Any kind of short-circuit fault that occurs has unique characteristics for current and voltage. However, any short-circuit fault that occurs on the transmission line must know about the type and how to address it differently. The application of Artificial Neural Networks (ANN) has been performed for the fault classification, and the fault location in the transmission line. According to the results of Hessine's research that using modular ANN can shorten the duration of the training and improve the accuracy of ANN for the kinds of faults as well as estimating the fault location [3]. It has also been proposed the application of DWT and SVM in order 4 using a sample frequency of 50 kHz. Summing the absolute values of the detailed coefficients at levels 8 and 9 are used as input for SVM. The results obtained that this technique is applied parallel transmission line [4,5]. This research will discuss the steps to class the faults and estimate the location of short circuit faults using the wavelet transformation and RNNs. The difference between wavelet transforms and Fourier transforms is that information is restricted only to the frequency domain, whereas information obtained by wavelet transforms is in the form of frequency and time domains. DWT is a wavelet transform whose function is to obtain information from transient signals when a short circuit fault begins.

Azriyenni et.al provided by back propagation neural network to identify fault location transmission line 150 kV among substation to substation. The fault in a power system is expended expense relay protection equipment in the transmission line. It requirements more growing big load and grid systems are accumulative complexity. The protection system uses the digital control, in order to avoid the error calculation of the distance relay impedance settings and spent time will be more efficient. Afterward backpropagation neural structure is a computational model that applies the training process that can be utilized to solve the problem of work limitations of distance protection relays. The backpropagation neural network does not have boundaries cause of the impedance variety setting. If the output delivers the wrong result, so the correctness of the weight can be minimized and also the response of error, the backpropagation neural network is invented to be closer to the precise value. In the end, backpropagation neural network demonstrating is asked to discover the fault location and identify operational output current circuit breaker was tripped it. The tests are implementation used system 150 kV of Riau region.

Otong et.al is presented to accurately detect a fault on the transmission line and quickly and reduce fault search time. The combination of the Park transformation method and the Adaptive Neuro Fuzzy Inference System (ANFIS) can be observed at the distance of the fault location immediately post the fault. The method used is a traveling wave analysis that changes current and voltage using the Park transformation at both ends of the line. The time difference at each end of the line is justified by the fact that there is a difference in distance. This time difference will be imported to ANFIS to obtain the distance of the fault location (Otong, Alimuddin, & B, 2017).

Neethu et.al has processed data generated of DWT to process transient signals as ANN input with backpropagation type. ANN technique with backpropagation type with TWD mother wavelet order dB4 of level 5 detail coefficients is more accurate to determine the type and location of the fault (A.S & T.S, 2017). Ahmed Saber et.al has proposed the application of DWT with a dB4 mother wavelet a sample frequency of 50 kHz where in the application of the sampling frequency the values in one cycle are 1000 samples and SVM. Summing the absolute values of the element constants level 8 and 9 are used as SVM input. The results obtained that this method is able to classify disorders in parallel transmission lines correctly (Saber, Emam, & Amer, 2016).

Azriyenni et.al implemented a hybrid method that is DWT and Support Vector Machine (SVM) for classification of fault in the transmission line. The DWT was set up to quotation the specified indication of transient D8 and D9 (order of 4) at 50 kHz for sample frequency. The value of Root Mean Square (RMS) will be given in the coefficients D8 and D9 for training and test data using SVM technique. SVM is used to detect the fault for every phase and the ground is exposed in the kind of fault. The SVM method has been run consuming parameter C and kernel scale to accomplish the brilliant results of fault classification. Category of replicating fault has a difference of fault location, fault of resistance and initial angle. The training and test data track for the test three bus systems.

Based on previous research relating to the identification of fault in the electric power transmission line using the concept of intelligent techniques. Identification of fault includes the classification and estimation of symmetrical short circuit fault. Then this research proposed a smart engineering concept using the DWT and RNN methods in the 115 kV transmission line. This model is expected to improve fault prediction by building a new Elman RNN structure. This research will be directed to excerpt D8 and D9 values consuming DWT with mother wavelet kind daubechies (order of 4) at 50 kHz sample frequency. The targeted results of the models are predictable to accomplish the numerous precision of the fault classification.

2. Metodology

2.1 DWT

DWT has capability to investigate several kinds of the fault with info gotten rather than the frequency dominion and time dominion. The DWT is very valuable in discovering and dispensation numerous faults

since of delicate to indication indiscretion [10]. The wavelet transform can be separated into two categories, namely; DWT and Continuous Wavelet Transforms (CWT). The CWT is the amount of indications over time increased by the scale and position of the wavelet task, the equation (Rucka & Wilde, 2006; Jamali & Ghaffarzadeh, 2011).

$$CWT(f, a, b) = \frac{1}{\sqrt{a}} \int_{-\infty}^{\infty} f(t) \varphi\left(\frac{t-b}{a}\right) dt \quad (1)$$

Discrete wavelet transforms are considered as easy implementations compared to continuous wavelet transforms. The wave coefficient is obtained by applying DWT like the following equation (Mosavi & Tabatabaei, 2014).

$$DWT(f, m, k) = \frac{1}{\sqrt{a_0^m}} \sum_k f(k) \varphi\left[\frac{n-ka_0^m}{a_0^m}\right] \quad (2)$$

DWT has several constants WT is a task as a measure and point. This stretches delivery to outcome numbers to be dismissed. The DWT have a couple of illustrations of WT of constants were acquired of DWT to decrease the left-over of constants of CWT. DWT is employed to investigate wave indications proficiently and precisely. The DWT will be effected a filter consuming Mallat procedure. DWT is separated into two wave indications i.e. filter methods and downcast sample processes. The high-pass clarify method produces additional indications with great frequency. The low-pass sieves generate different indications with little frequency. After that, the figures will be achieved down sample process. So it only earnings half of every statistic acquired already [10]. In Figure 1, we can indicate to the diagram of the sign dispensation by DWT. The extreme frequency signs are named elements and signs with little frequencies named estimates. The procedure of decomposition by iteration consuming of guesstimate of the data gained formerly. It will be decayed to generate new approximation and feature records. Figure 2 expressions in the structure of the decay iteration procedure, to become a new wave indication. It will be created by summing the calculation data and detail data.

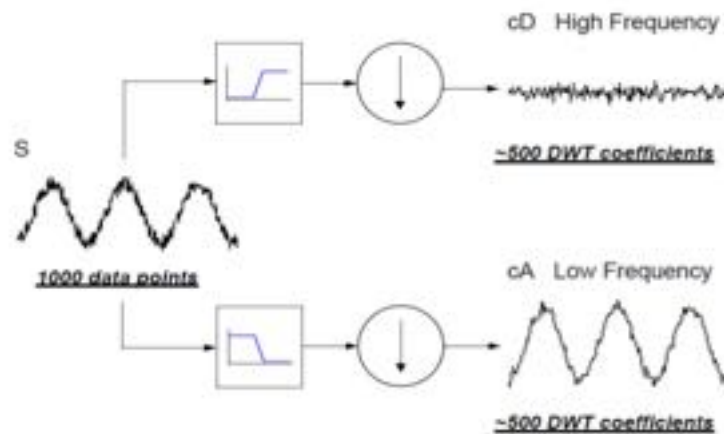


Fig. 1. Diagram signal processing DWT

a and b are scale constants and transition constants (time shifts), $CWT(f, a, b)$ is the coefficient of CWT and, φ is an artificial wavelet. Input signals have been rearranged using displacement and time expansion parameters for the right scale. In the wavelet transform the mother wavelet is used in processing the original signal. Mother wavelet consists of various types such as Haar, Daubechies, Coiflets, Symlets. The most widely used mother wavelets are daubechies which are commonly composed dbN, somewhere N is the order, and db shows the name of the Daubechies mother wavelet (Borghetti, Bosetti, & Paolone, 2008).

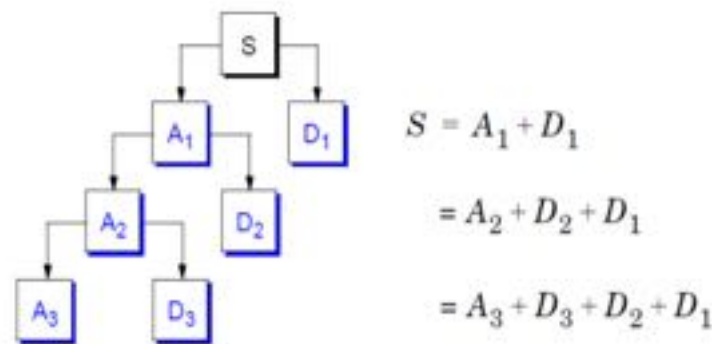


Fig. 2. The iteration is DWT decomposition

2.2 Elman’s RNN Structure

A simple recurrent neural network is a variation of the Multi-Layer Perceptron known as the Elman network, discovered by Jeff Elman. The main difference in this structure is that there are units adjacent to the input layer that is attached to the hidden layer. The unit includes the contents of one of the layers that existed when the previous pattern was trained. Elman RNNs involves of one or more hidden layers. The first layer has the weight obtained from the input layer. Each layer will receive the weight since the earlier layer. This structure customs initiation purposes recognized as binary sigmoid, bipolar sigmoid for hidden input layer and a linear role for output layer.

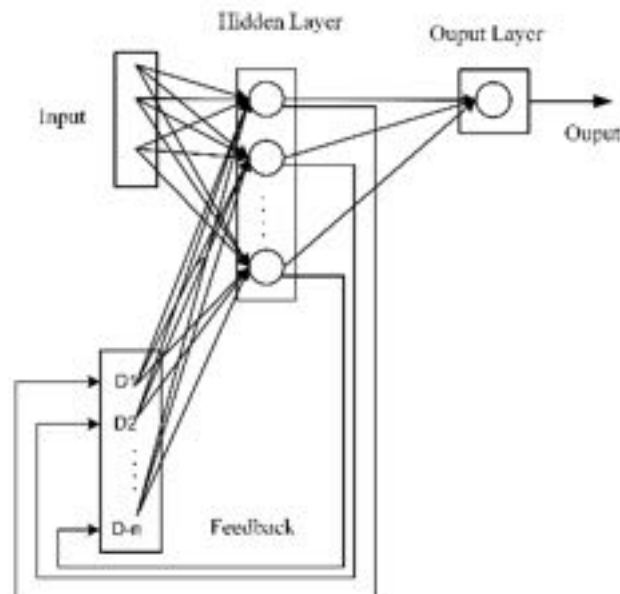


Figure 3. Structure of Elman’s RNN

This Elman network has a triggering role which can have some function, both continuous and discontinuous. The delay that occurs in the relationship among the input layer and the first hidden layer in the prior time (t-1) can be utilized to know (t). Figure 3 is the Elman RNN structure having a feedback connection consisting of disturbance information on the previous input to be accommodated for the input. The nature of this feedback is that the unit can be still recycle information through the network for some time, and thus find

an abstract representation of time. RNNs has an activation feedback embodying short-term memory. The layer is refreshed not only by external network input but also by activation of prior forward propagation. This response is replaced with a set of weights to allow reflex adaptation.

2.3 Power System Transmission

Figure 4 is the transmission system expanded is collected of three buses that are; Bus LK to Bus BK. The transmission line system is presently below a voltage of 115 kV besides a frequency of 50 Hz. In the transmission line among the Bus LK and the short-circuit fault at Bus BK. The interval of a transmission line from Bus LK to Bus BK is 63 km.

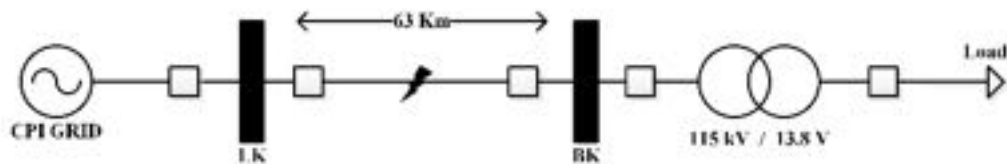


Fig. 4. Single line diagram transmission system

Fault current obtained by simulation results using with a 60 kHz sampling frequency is processed using the DWT function. Flow is observed during one cycle after the disturbance occurs. The fault current is processed using DWT after the DWT output becomes input data for Elman RNNs to determine the classification and estimation of fault locations. The sequence of wavelet decay with a sample frequency of 50 kHz can be seen in Table 1. The more decomposition process, the sign can be separated into several low-resolution components. Accordingly, the lower frequency component filter process will be run continuously. Table 1 designates the decomposition of wavelet level 9 for a single cycle after the fault with a sample frequency of 50 kHz [12].

Table 1. the Wavelet Decomposition Command

Level	Approximation	Detail
1	0 – 12.5 kHz	12.5 – 25 kHz
2	0 – 6.25 kHz	6.25 – 12.5 kHz
3	0 – 3.125 kHz	3.125 – 6.25 kHz
4	0 – 1.563 kHz	1.563 – 3.125 kHz
5	0 – 781 Hz	781 – 1.563 kHz
6	0 – 391 Hz	391 – 781 Hz
7	0 – 195 Hz	195 – 391 Hz
8	0 – 98 Hz	98 – 195 Hz
9	0 – 49 Hz	49 – 98 Hz

The selection of the best Elman RNN structure results on the classification Elman RNN type and estimated of fault location. Then the Elman RNN test was selected with different input from the training and testing data as displayed in Table 2. The accuracy and error obtained from the Elman RNN classification results and the estimated fault location have been selected.

Table 2. Parameters for testing RNNs of the classification and estimation of fault locations

Identification	Fault	L (%)	R (Ω)	D (%)
Classification & Estimated fault	LG	1,6, 5,6, 9,6, ..., 93,6, 97,6	45	65
	LL			
	LLG			
	LLL			

2.4 RNNs of Elman for Fault Classification

Elman RNN are manufactured using the Elman RNN which classifies fault in each phase and ground that work in parallel. When there is fault in a phase, then the Elman type RNN will provide information of the form of fault in that phase. If there is a fault of the ground, the RNNs will be delivered through the zero sequence current signal and given the information of the fault according to the zero sequence current values that are trained on the Elman RNNs. Figure 5 shows all the information from the fault classification, it is known that a short circuit fault happens on the transmission line. Figure 5 is further the structure of RNNs consisting of input data, hidden layers, and output layers. The resulting output appears in the form of whether or not there is fault with the phase and ground.

In the Elman RNN simulation the fault given are variations in the current RMS values for the coefficients D8 and D9. Input variations can be divided into:

- 2 RMS phase current details coefficients A
- 2 RMS phase current details coefficients B
- 2 RMS phase current details coefficients C
- 2 RMS coefficients details of the zero sequence current

For each RNN Elman classifies the fault in phase A, B, and C that is used as input is a sample of the fault current in each phase. Classification of fault on the ground serves as a zero sequence current input.

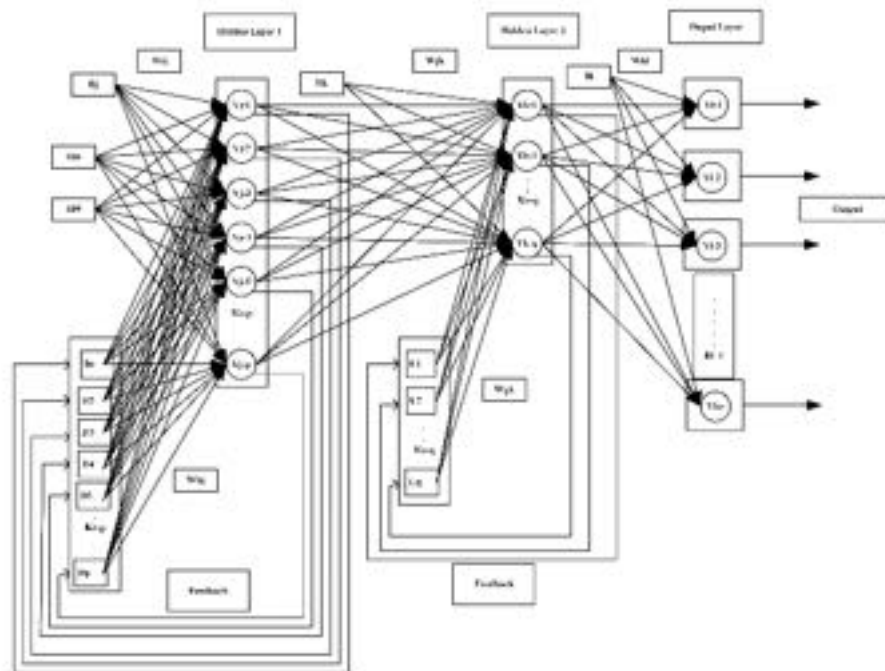


Figure 5. Elman's RNN Structure of fault classification

2.5 RNNs Elman for Fault Estimation

RNN Elman estimated location of fault was built to estimate the location of fault in each fault and provide the results of fault at the distance location. Each type of fault under a RNN structure for estimating different fault locations. Types of fault that has been simulated are LG (AG, BG, CG), LL (AB, AC, BC), LLG (ABG, ACG, BCG) and LLL (ABC) fault. In designing Elman RNN for estimating the location of this fault, it will be finished with input variations. In this RNN two structures are integrated in; RNN 1 and RNN 2. The difference in the value of Ir_dec RNN 1 is 0.6 and the value of Ir_dec RNN 2 is 0.7. This intends to choose the results of accuracy and duration of training that is better and faster for training the estimated location of fault. Figure 6 shows the training process carried out 100 times. Iteration with training error tolerance value is 0.000001. Elman RNN structure for fault estimation.

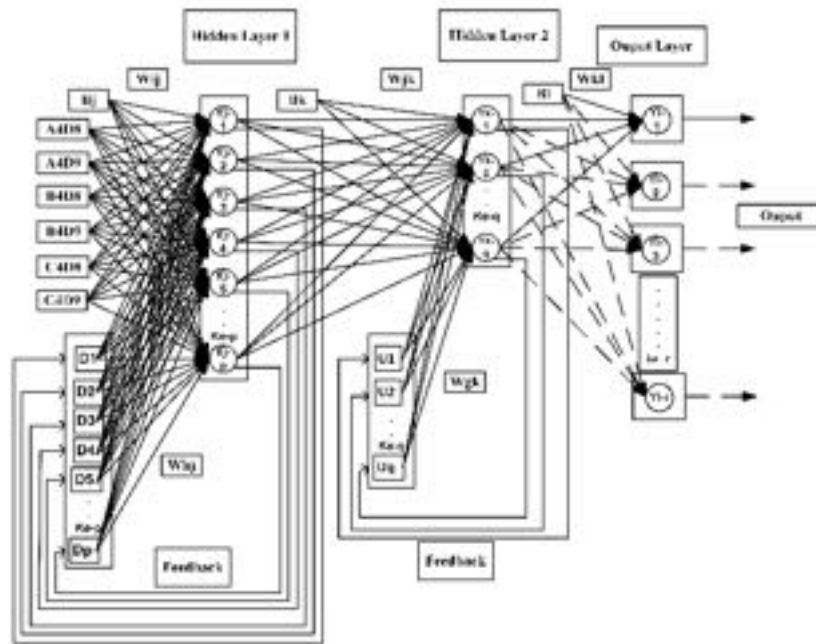


Figure 6. Elman RNN structure estimated fault location

Figure 6 is Elman's RNN structure for estimating fault locations. The RNN was constructed to estimate the location of the fault consisting of input data, hidden layer, and output layer. The resulting output data are information in the form of distance to the location of the fault. For the estimated location of the fault, six input data are given, namely the RMS current coefficient D8 and D9 after each phase fault, as formulated as follows:

$$X_{FL} = [ID8_A, ID9_A, ID8_B, ID9_B, ID8_C, ID9_C]$$

X_{FL} : Input RNN for estimated fault location, $ID8_i$: RMS current for D8 coefficient post fault, $ID9_i$: RMS current for current D9 coefficient post fault, i : Phase A, B, C.

Mean Absolute Percentage Error (MAPE)

To validate the reliability of a forecast process, you can use MAPE. How to get the MAPE consists of calculate the absolute error of each period divided into the actual observation value for that period. MAPE calculation results are used to determine whether or not the predictions produced. Predictive ability is very useful if the MAPE is less than 10% (Margi, 2015).

$$\text{MAPE} = \frac{\sum \frac{|y_i - y'_i|}{y_i}}{n} \times 100\% \quad (3)$$

y_i : target value, y'_i : predictive output, n : amount of data

3. Results

Training for estimated fault locations for RNN 1 was carried out as much as 38,669 iterations on the duration of 3 minutes 4 seconds. When, RNN 2 runs 7212 iterations at a duration of 24 seconds. Then, testing for the Elman RNN structure was trained to estimate the location of the fault when ABC fault occurred. Testing for the estimated location of RNN 1 fault has an iteration of 500,000 with a training duration of 3 hours 42 minutes 4 seconds. Furthermore, RNN 2 is executed with 325,191 iterations in the duration of the training 1 hour 23 minutes 39 seconds. After conducting training and testing on various types of Elman RNN classification and estimation of fault locations, the outputs of each network are then seen. The Elman RNN is used based on the output of the Elman RNN, namely by looking at the smallest MAPE value and training duration in the classification and estimation of the fault location of each Elman RNN. The results of the Elman's RNN structure selection used are as shown in Table 3.

Table 3. Elman RNN structures used for classification and estimated of fault location

Elman RNN Network	Elman RNN Networks
Fault Classification of Phase A	A1D8 – A10D8, A1D9 – A10D9
Fault Classification of Phase B	B1D8 – B10D8, B1D9 – B10D9
Fault Classification of Phase C	C1D8 – C10D8, C1D9 – C10D9
Fault Classification of Ground	N1D8 – N10D8, N1D9 – N10D9
Estimated Location of Fault AG	A1D8, A1D9, B1D8, B1D9, C1D8, C1D9
Estimated Location of Fault BG	A2D8, A2D9, B2D8, B2D9, C2D8, C2D9
Estimated Location of Fault CG	A3D8, A3D9, B3D8, B3D9, C3D8, C3D9
Estimated Location of Fault AB	A4D8, A4D9, B4D8, B4D9, C4D8, C4D9
Estimated Location of Fault AC	A5D8, A5D9, B5D8, B5D9, C5D8, C5D9
Estimated Location of Fault BC	A6D8, A6D9, B6D8, B6D9, C6D8, C6D9
Estimated Location of Fault ABG	A7D8, A7D9, B7D8, B7D9, C7D8, C7D9
Estimated Location of Fault ACG	A8D8, A8D9, B8D8, B8D9, C8D8, C8D9
Estimated Location of Fault BCG	A9D8, A9D9, B9D8, B9D9, C9D8, C9D9
Estimated Location of Fault ABC	A10D8, A10D9, B10D8, B10D9, C10D8, C10D9

The DWT output is used as input to Elman's RNN. The training process is carried out with a maximum iteration of 500,000 with a tolerance value of 0.0001. The two RNN structures are structure one uses the gradient descent adaptive learning rate for RNN 1 and, the second structure uses the gradient descent adaptive learning rate for RNN 2. Table 5 shows the structure of RNN 1 built on the standard gradient descent adaptive learning rate, while RNN 2 is a standard gradient descent adaptive learning rate aimed at reducing the duration of training. The different parameters of RNN 1 and RNN 2 are detailed in that table. Table 6 shows the simulation results for the classification of fault determined that there is fault in each phase and soil correctly according to the type of fault that occurs, so the accuracy of the fault classification is 100%. The simulation results for the estimated location of the fault obtained by MAPE with a very small value. Each type of fault produced an excellent error value namely; 1,017433% for RNNs 1 and 1,418568% for RNNs 2.

Table 5. Elman's RNN parameters classification and estimated fault location

Characteristic	RNN 1	RNN 2
Architecture	two hidden layer	two hidden layer
Neuron input	fault current of D8 & D9	fault current of D8 & D9
Neuron hidden layer 1	48	48
Neuron hidden layer 2	24	48
Neuron output	1	1
Activation function of hidden layer 1	Sigmoid binary	Sigmoid binary
Activation function of hidden layer 2	Sigmoid bipolar	Sigmoid bipolar
Activation function of output layer	linear function	linear function
Weight	Min Max	Min Max
Toleransi error	0.0001	0.0001
Maximum iteration	500,000	500,000
Learning rate	0.1	0.1
Ratio to increase the learning rate	1.05	1.05
Ratio to decrease the learning rate	0.6	0.7
Maximum increase in performance	1.06	1.06

Table 6. MAPE of Elman's RNN 1 & 2 are used to identify fault

Fault	Error (%)					
	MAPE		Maximum		Minimum	
	RNNs 1	RNNs 2	RNNs 1	RNNs 2	RNNs 1	RNNs 2
AG	0.245137	0.245137	0.241118	0.241118	0.000029	0.000029
BG	0.504459	0.622443	0.378000	0.281476	0.004000	0.281476
CG	0.321504	0.328350	0.207000	0.264986	0.000000	0.264986
AB	0.282843	0.680925	0.261000	0.412825	0.000000	0.000929
AC	0.892839	0.892839	0.306349	0.306349	0.006151	0.006151
BC	1.017433	0.386365	0.362200	0.202113	0.002000	0.000795
ABG	0.605522	1.418568	0.250963	0.430777	0.000912	0.006889
ACG	0.326534	0.326534	0.305512	0.305512	0.001058	0.001058
BCG	0.502179	0.502179	0.305233	0.305233	0.002017	0.002017
ABC	0.629717	0.629717	0.270158	0.270158	0.004765	0.004765

4. Conclusion

Based on the Elman RNN network design as fault classification and estimated fault location in the 115 kV transmission system, it is concluded that the Elman RNN for fault classification is carried out for each phase and soil correctly and in accordance with the type of fault, so that the accuracy of Elman RNN for fault classification is 100%. Then, the average error value for Elman RNN structure testing for the estimated fault location of 0.245137% occurred in the type of fault AG (RNNs 1 & 2). When, the largest average error generated for the estimated location of fault (BC) is 1.017433% (RNNs 1 & 2). So that from all analyzes obtained the error results below 10%, it can be possible to conclude that the category of fault prediction using the Elman's RNN networks is very good at determining the predicted fault in the 115 kV transmission line.

References

- A.S, N., & T.S, A. (2017). Smart Fault Location and Fault Classification in Transmission Line. *IEEE*, 339-343.
- Borghetti, A., Bosetti, M., & Paolone, M. (2008). Continuous-Wavelet Transform for Fault Location in Distribution Power Networks: Definition of Mother Wavelet Inferred from Fault Originated Transients. *IEEE Transactions on Power Systems*, 23(2), 380-389.
- Jamali, S., & Ghaffarzadeh, N. (2011). A new method for arcing fault location using discrete wavelet transform and wavelet networks. *European Transactions on Electrical Power*, 22, 601-615.
- Kusumadewi, S. (2003). *Artificial Intelligence (Teknik dan Aplikasinya)*. Yogyakarta: Andi.
- Mosavi, M., & Tabatabaei, A. (2014). Wavelet and neural network-based fault location in power systems using statistical analysis of traveling wave. *Arab J Sci Eng*, 8, 1-8.
- Otong, M., Alimuddin, & B, C. A. (2017). Deteksi Jarak Lokasi Gangguan Pada Saluran Transmisi 500 Kv Cilegon Baru - Cibinong Menggunakan Adaptive Neuro Fuzzy Inference System (ANFIS). *p-ISSN*.
- Ray, P., & Mishra, D. P. (2016). Support Vector Machine Based Fault Classification and Location of a Long Transmission Line. *Engineering Science and Technology, an International Journal*, 19(3), 1368-1380.
- Rucka, M., & Wilde, K. (2006). Application of continuous wavelet transform in vibration based damage detection method for beams and plates. *Journal of Sound and Vibration*, 297, 536-550.
- Saber, A., Emam, A., & Amer, R. (2016). Discrete Wavelet Transform and Support Vector Machine Based Parallel Transmission Line Fault Classification. *IEEJ Transactions on Electrical and Electronic Engineering*, 43-48.

Recurrent Neural Networks to Identify Fault in Transmission Line

ORIGINALITY REPORT

25%

SIMILARITY INDEX

6%

INTERNET SOURCES

19%

PUBLICATIONS

8%

STUDENT PAPERS

PRIMARY SOURCES

- 1** Azriyenni Azhari Zakri, Syukri Darmawan, Jafaru Usman, Iswadi Hasyim Rosma, Boy Ihsan. "Extract Fault Signal via DWT and Penetration of SVM for Fault Classification at Power System Transmission", 2018 2nd International Conference on Electrical Engineering and Informatics (ICon EEI), 2018
Publication **15%**
- 2** section.iaesonline.com
Internet Source **4%**
- 3** P.K. Dash, Joymala Moirangthem, Sahasranshu Das. "A new time–frequency approach for distance protection in parallel transmission lines operating with STATCOM", International Journal of Electrical Power & Energy Systems, 2014
Publication **1%**
- 4** www.j3.jstage.jst.go.jp
Internet Source **<1%**
- 5** pe.org.pl
Internet Source **<1%**

6

link.springer.com

Internet Source

<1%

7

Debani Prasad Mishra, Papia Ray. "Fault detection, location and classification of a transmission line", Neural Computing and Applications, 2017

Publication

<1%

8

worldwidescience.org

Internet Source

<1%

9

Goren Gordon, Ehud Ahissar. "Reinforcement active learning hierarchical loops", The 2011 International Joint Conference on Neural Networks, 2011

Publication

<1%

10

Praveen Kumar Mishra, Anamika Yadav, Mohammad Pazoki. "A Novel Fault Classification Scheme for Series Capacitor Compensated Transmission Line Based on Bagged Tree Ensemble Classifier", IEEE Access, 2018

Publication

<1%

11

Deng, Xiangtian, Rongxiang Yuan, Zhenfeng Xiao, Timing Li, and Kaiwen Li Liu Wang. "Fault location in loop distribution network using SVM technology", International Journal of Electrical Power & Energy Systems, 2015.

Publication

<1%

12

docplayer.info

Internet Source

<1%

13

Submitted to Cardiff University

Student Paper

<1%

14

Samet, Haidar, Amin Shabanpour-Haghighi, and Teymoor Ghanbari. "A fault classification technique for transmission lines using an improved alienation coefficients technique : A Fault Classification Technique for Transmission Lines", International Transactions on Electrical Energy Systems, 2016.

Publication

<1%

15

Submitted to Queen Mary and Westfield College

Student Paper

<1%

16

H. Farouk, H. A. Elsalamony. "Digital library creation based on wavelet coefficients for video stream indexing and retrieving", 2010 2nd International Conference on Signal Processing Systems, 2010

Publication

<1%

17

Submitted to University of Edinburgh

Student Paper

<1%

18

Susanta Kumar Gauri. "Control chart pattern recognition using feature-based learning vector quantization", International Journal of Advanced Manufacturing Technology, 10/20/2009

<1%

19

Submitted to Queensland University of Technology

Student Paper

<1%

20

Submitted to Universiti Malaysia Pahang

Student Paper

<1%

21

Meyur, Rounak, M.Jaya Bharata Reddy, P. Rajaraman, Mallikarjuna Balimidi, N. A. Sundaravaradan, and Dusmanta Mohanta. "Real-Time Fault Analysis of Transmission Lines Using Wavelet Multi Resolution Analysis Based Frequency Domain Approach", IET Science Measurement & Technology, 2016.

Publication

<1%

22

H. M. Manesh, G. Lugrin, R. Razzaghi, C. Romero, M. Paolone, F. Rachidi. "A new method to locate faults in power networks based on Electromagnetic Time Reversal", 2012 IEEE 13th International Workshop on Signal Processing Advances in Wireless Communications (SPAWC), 2012

Publication

<1%

23

Submitted to The University of Manchester

Student Paper

<1%

24

Rahman Dashti, Javad Sadeh. "Applying Dynamic Load Estimation and Distributed-

<1%

parameter Line Model to Enhance the Accuracy of Impedance-based Fault-location Methods for Power Distribution Networks", Electric Power Components and Systems, 2013

Publication

25

Submitted to University of Bath

Student Paper

<1%

26

Submitted to University of Nottingham

Student Paper

<1%

Exclude quotes Off

Exclude matches Off

Exclude bibliography On